

# Damage of houses and residential areas by niigata prefecture earthquakes (Part2)

メタデータ	言語: eng 出版者: 公開日: 2017-10-03 キーワード (Ja): キーワード (En): 作成者: メールアドレス: 所属:
URL	<a href="http://hdl.handle.net/2297/16728">http://hdl.handle.net/2297/16728</a>

## **Damage of Houses and Residential Areas by Niigata Prefecture Earthquakes (Part2)**

*Toru Takata*

Soil Design Inc.

Tokyo, Japan

*Mamoru Fujii*

Tokai University

Kanagawa, Japan

*Katsuya Matsushita*

Misawa Homes Institute of Research and Development Co., Ltd.

Tokyo, Japan

*Hirakazu Seki*

Kanazawa University

Ishikawa, Japan

### **ABSTRACT**

The earthquakes of Chuetsu (2004) and Chuetsu offshore (2007) in Niigata Prefecture, caused liquefaction at many locations, and also caused damages on the residences and the residential areas due to the failure of ground. In the future, the judgment of liquefaction on housing site will become important and it will be thought that the upgrade of soil investigation and liquefaction countermeasure is necessary. In Japan, Swedish weight sounding (SWS) has been widely used in soil investigation on residential areas. Based on the result of SWS, the bearing capacity of ground can be obtained. However, the judgment of liquefaction is not obtained.

This paper reports results of SWS, boring investigation, standard penetration test (SPT), and three component cone penetration test (CPT) on the housing site which caught the liquefaction damage by the earthquake of Chuetsu offshore (2007) in Niigata Prefecture. In addition, it reports the applicability of the CPT on the housing site of Japan.

**KEY WORDS:** Soil investigation; cone penetration test; Swedish weight sounding; liquefaction; residential areas.

### **INTRODUCTION**

The Building Standard Law of Japan says that "It is necessary for the ground with the fear of the liquefaction by an earthquake to confirm that the harmful damage, transformation, subsidence to the part of a building do not produce". It can be said that the examination of the liquefaction is essential because this law is applied to the private housing without exceptions. The problem of the liquefaction on the housing sites in Japan is viewed easily from a documentary search such as "maps for liquefaction sites", because the SWS are common. In addition, it is difficult to take a liquefaction countermeasure by a private housing financially, and this is a factor to take a liquefaction judgment easy.

The simple judgment method of liquefaction based on soil investigation

has a judgment method based on the SPT (N-value) and the CPT ( $q_c$ ). In Japan, a judgment method based on the SPT is common. It is a big factor that a Japanese design system based on N-value is established. However, it is rare that the SPT is performed for the soil investigation on housing areas because the SPT is expensive. On the other hand, the CPT is not common in Japan. This cause is in the Japanese ground where there is gravel carried by the fast flowing stream river from the hilly district to the estuary. Therefore, soil investigation using the CPT is difficult in Japan. However, the CPT is economical in comparison with the SPT and laboratory soil test. In addition, the CPT gives us soil classification, bearing capacity, consolidation of the ground, and the position of groundwater level without the sampling of soil. In this respect, the CPT is effective in the soil investigation on housing sites. Most of this investigation is used by the SWS first. Therefore, it is thought that the trouble that a cone cannot be penetrated get fewer because it can estimate the penetrated power of cone based on the result of the SWS.

This paper reports a result of the SWS, boring investigation, grain size analysis, the SPT, the CPT on the housing site that had been caught the liquefaction damage by the earthquake of Chuetsu offshore (2007) in Niigata Prefecture. In addition, it reports the current status of the seismic performance evaluation and the applicability of the CPT to the residential areas of Japan.

### **PLAN FOR GROUND INVESTIGATION**

The investigation place is two housing sites (Kashiwazaki- Matsunami and Kashiwazaki-Hashiba) that caught the liquefaction damage by the earthquake of Chuetsu offshore (2007) in Niigata Prefecture (Fig. 1). The magnitude ( $M$ ) of this earthquake was 6.8; the peak horizontal acceleration at the ground surface ( $a_{max}$ ) generated by this earthquake was about 400 gal. The sand boil due to liquefaction was remarkably generated on the both housing sites, and differential settlement was caused in the houses. We investigated the three soundings of the SWS, the CPT, and the SPT in this both sites. Moreover, the grain size distribution was analyzed and the soil classification was examined using the soil samples obtained from boring holes.

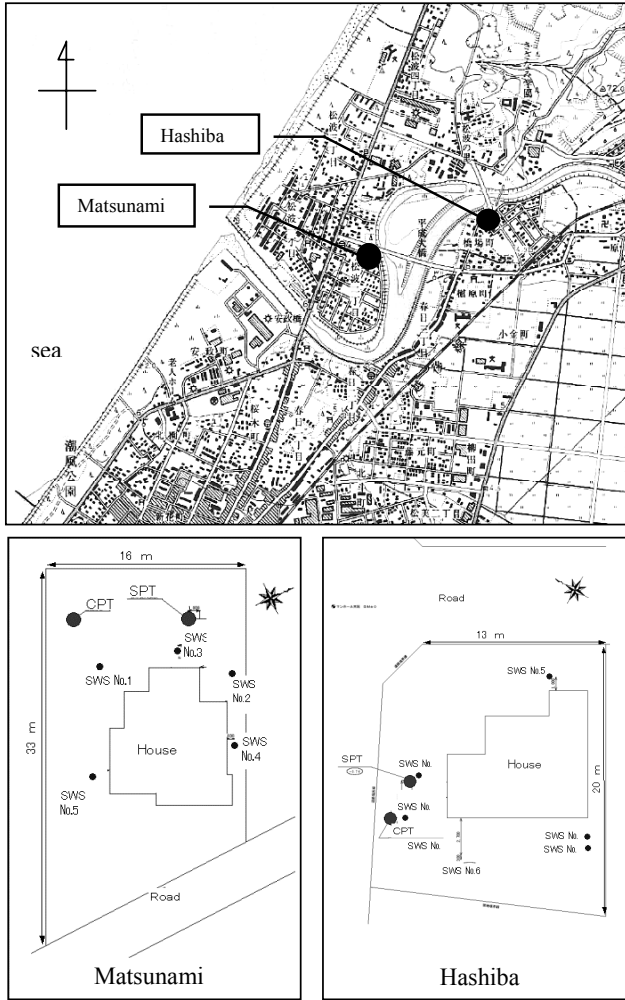


Fig. 1. Location of investigation site

Table 1. This ground investigation and the investigation standard

Examination item	Standard No.	Examination Value
Swedish weight sounding (SWS)	JIS A1221	Static penetration resistance ( $W_{sw}, N_{sw}$ )
Cone penetration test (CPT)	JGS 1435-2003	Cone resistance ( $q_c$ ) Pore water pressure ( $u$ )
Standard penetration test (SPT)	JIS A1219-2001	$N$ -value
Grain size analysis	JIS A1204:2000	Maximum grain size Grain size distribution curve Fine fraction content

Note: JIS; Japanese Industrial Standard  
JGS; Japanese Geotechnical Society

These investigation methods were based on the each standard shown in

Table 1. We used the CPT-cone that can measure skin friction ( $f_s$ ) in addition to general cone that measured cone resistance ( $q_c$ ) and pore water pressure ( $u$ ). Moreover, we measured the position of groundwater level by the excess pore water pressure dissipation test of the CPT.

These ground investigation has performed after one month or more passes this earthquake though it is necessary to examine ideally based on the result of ground investigation before the earthquake. The SWS has been done in both residential areas before this earthquake. Therefore, the SWS have gone again to understand the ground characteristic of the earthquake before and after.

## RESULTS OF THE GROUND INVESTIGATION

Figure 2(a) shows each investigation results (boring log, the SPT, the CPT, the SWS) of Matsunami area, and Fig. 2(b) shows one of Hashiba area. Matsunami area had fine sand of  $N$ -value about 10-20 in GL-4.75-10.5m. Hashiba had filling sand of  $N$ -value about 5 in GL-1.95-4.7m on the old river. The position of groundwater level was GL-3.3m at Matsunami area, and GL-3.1m at Hashiba area. The value of each penetration resistance distribution of the SPT ( $N$ -value), the CPT ( $q_c$ ), the SWS ( $W_{sw}, N_{sw}$ ) shows similar tendency. We obtain measurements at 1.0m intervals from the SPT, and measurements at 0.25m intervals from the SWS. On the other hand, the CPT has an advantage that a thin stratum can be detected because we obtain continuous measurements at 0.01m intervals from the CPT. Equation 1 which evaluates  $N$ -value from the SWS results is proposed by Inada (1960).

$$N = \begin{cases} 3.0W_{sw} + 0.050N_{sw} & (\text{cohesive soil}) \\ 2.0W_{sw} + 0.067N_{sw} & (\text{sandy soil}) \end{cases} \quad (1)$$

Equation 2 which evaluates  $N$ -value from the CPT results is proposed by Saematsu and Suzuki (2005).

$$N = \begin{cases} 0.340I_c^{1.94}(q_t - 0.2)^{(1.34 - 0.0927I_c)} & (q_t > 0.2 \text{ MPa}) \\ 0 & (q_t \leq 0.2 \text{ MPa}) \end{cases} \quad (2)$$

In addition, the conversion method of soil classification using the value of  $q_c, f_s$ , and  $u$  is proposed. Robertson et al. (1990) proposes soil behavior type index ( $I_c$ ) calculated from the following equation:

$$I_c = \sqrt{(3.47 - \log_{10} Q_t)^2 + (\log_{10} F_r + 1.22)^2} \quad (3)$$

where  $Q_t$  is normalized cone resistance ( $(q_t - \sigma_{vo})/\sigma'_{vo}$ ), and  $F_r$  is normalized friction ratio ( $f_s/(q_t - \sigma_{vo})$ ). The value of  $I_c$  gives us soil classification shown in Table 2. Moreover, Equation 4 which evaluates fine fraction content ( $F_c$ ) from the value of  $I_c$  is proposed by Saematsu and Suzuki (2005).

$$F_c = I_c^{4.2} \quad (4)$$

Table 2. Soil classification using  $I_c$

Division No.	$I_c$	Soil classification
1	< 1.31	gravelly sand
2	1.31 ~ 2.05	sand to silty sand
3	2.05 ~ 2.60	silty sand to sandy silt
4	2.60 ~ 2.95	silt to silty clay
5	2.95 ~ 3.60	silty clay to clay
6	3.60 <	organic material

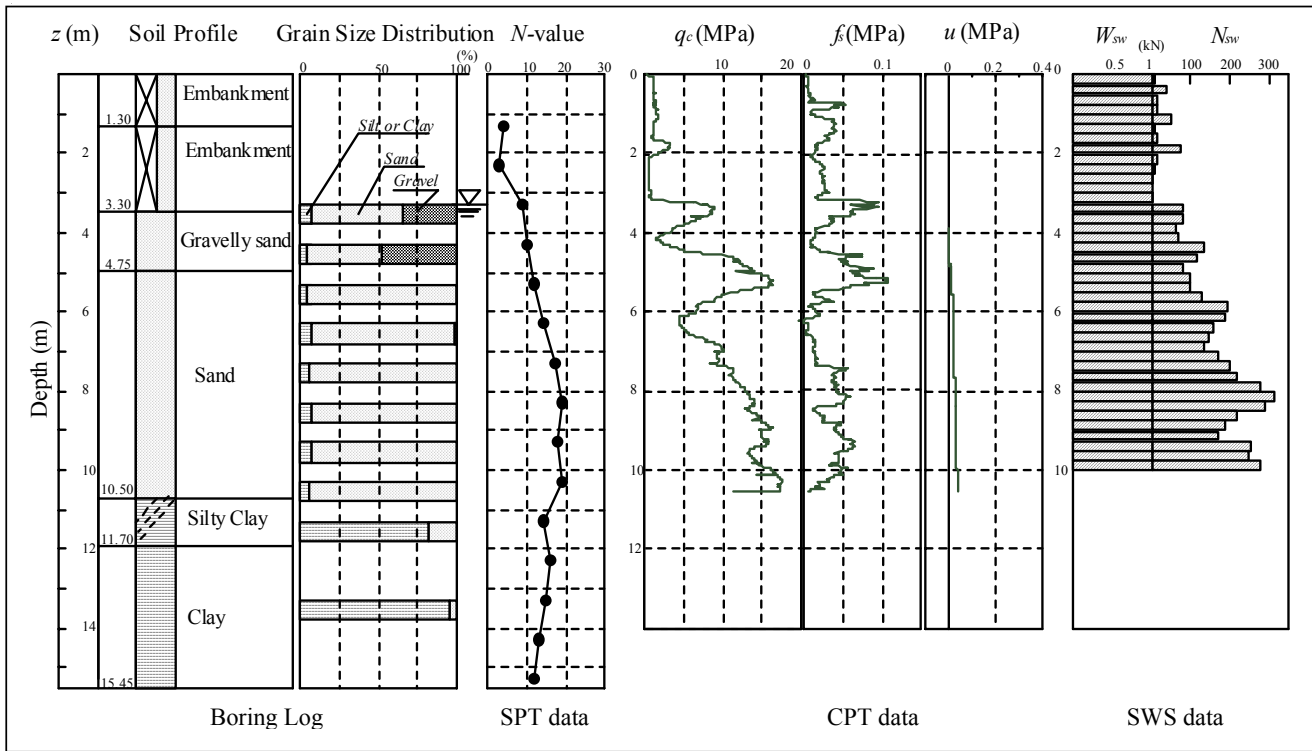


Fig. 2(a). The result of the ground investigation (Site: Matsunami area)

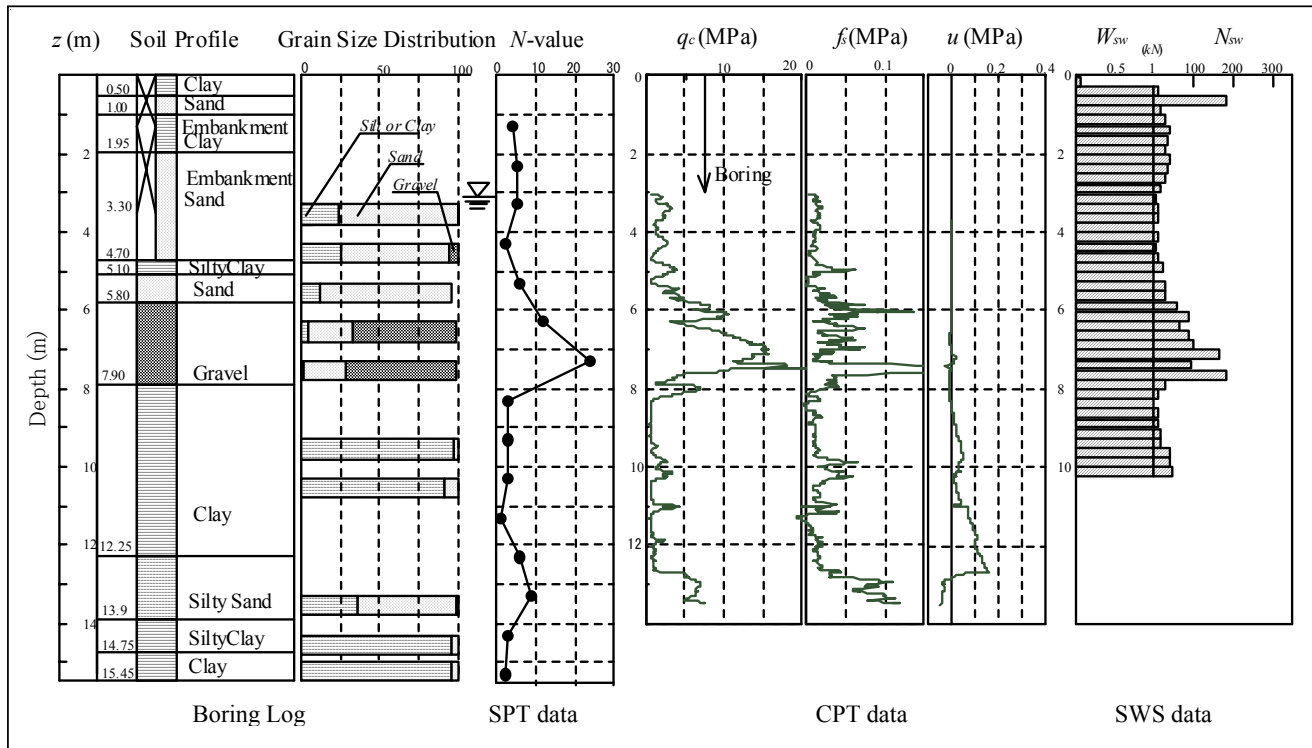


Fig. 2(b). The result of the ground investigation (Site: Hashiba area)

The results of the comparison between  $I_c$  and boring log are shown in Fig. 3, and the comparison between fine fraction content based on the CPT results and grain size analysis are shown in Figure 4, and the comparison between  $N$ -value by the CPT, the SWS and the SPT are shown in Fig. 5. The soil classification and  $F_c$  using the CPT results was comparatively similar to the results of boring log and grain size analysis. However, there is a difference in a detailed part of both soil classification, and there is an enough correlation in rough division such as gravel, sandy, silt, and clay. Moreover, the results of  $N$ -value by the CPT, the SWS agree with it by the SPT.

Figure 6 shows the comparison of the SWS results before the earthquake and after it at Matsunami area. The SWS results at Hashiba

area can't be comparable, because the investigation depth (GL-0.25 ~ 0.5m) is too shallow because of the hard embankment. In the result at Matsunami area,  $N$ -value evaluated using the SWS after the earthquake are smaller than ones before the earthquake. Generally, it is said that the ground, which liquefied in the past, increases the liquefaction resistance, because the wet density increases. This result implies that there is not the effect of compaction due to the earthquake motion. This result is only at one area and it cannot be said enough volume of data.

However, there is a case with little compaction effect of earthquake like this result. We think that the ground that is not equal in density, the time of the earthquake motion and the residual displacement after the earthquake are related to the factor of this result. Therefore, we think that the ground that has been caused liquefaction due to the earthquake is a possibility of liquefaction due to a similar earthquake again.

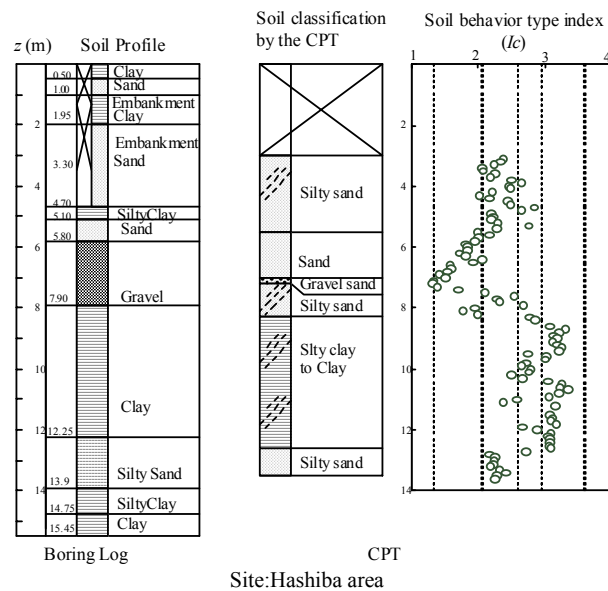
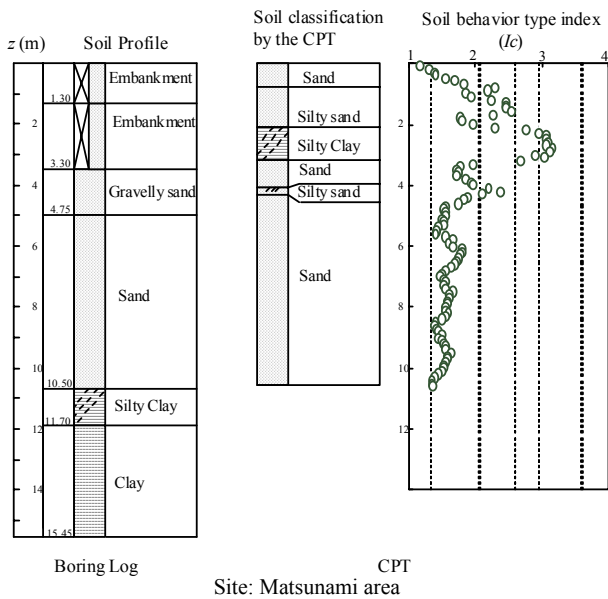


Fig. 3. Comparisons between soil classification based on the CPT results and boring log (reference table.2)

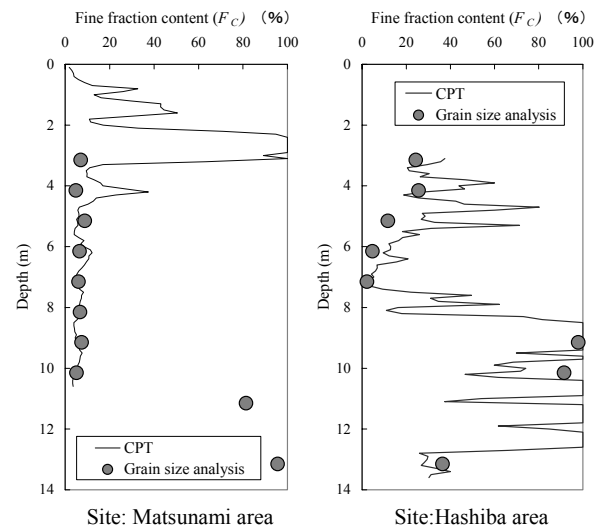


Fig. 4. Comparisons between fine fraction content based on the CPT results and grain size analysis

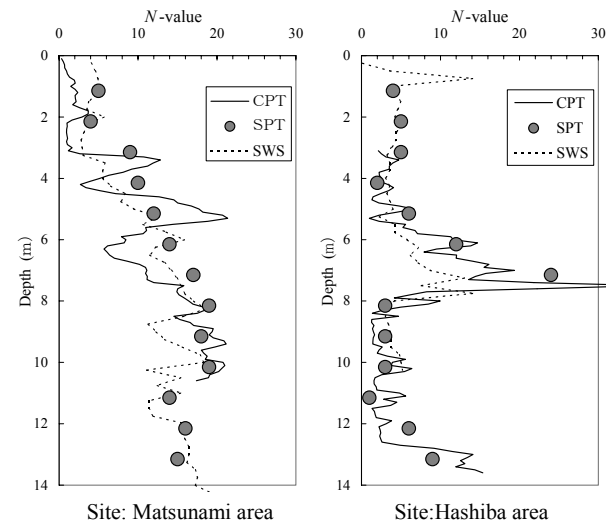


Fig. 5. Comparisons between  $N$ -value by the CPT, the SWS and the SPT

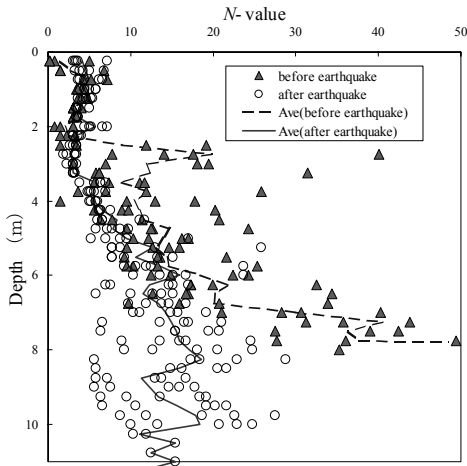


Fig. 6. Comparisons of the SWS results before the earthquake and after one at Matsunami area

### COMPARISON BETWEEN THE JUDGEMENT METHOD OF LIQUEFACTION USING CPT AND SPT

The method of judging liquefaction is the detailed one and the simple one, and this research used the simple method. The outline is shown as follows:

#### (a) Detailed judgment method

The liquefaction resistance ratio ( $R$ ) is measured from the results of cyclic triaxial test using the undisturbed sample obtained in situ, and the cyclic shear stress ratio ( $L$ ) is obtained from seismic response analysis etc. Thus, we obtain the liquefaction safety rate ( $F_L$  ( $: R/L$ )).

#### (b) Simple judgment method

The liquefaction resistance ratio ( $R$ ) is converted from the results of ground investigation or laboratory test, and the shear stress ratio ( $L$ ) is calculated from the design earthquake motion. Thus, we obtain the liquefaction safety rate ( $F_L$  ( $: R/L$ )).

The liquefaction resistance ratio ( $R$ ) in any depth can be converted from some methods. Recommendations for design n of building foundations issued by Architectural Institute of Japan (2001) shows the following two methods as a method with high reliability.

- 1) Method of presuming  $R$  based on the SPT results ( $N$ -value) and the grain size analysis results ( $F_C$ ).
- 2) Method of presuming  $R$  based on the CPT results ( $q_c, f_s$  and  $u$ ).

The cyclic shear stress ratio ( $L$ ) is calculated from the following equation:

$$L = \frac{\tau_d}{\sigma'_z} = r_n \frac{a_{max}}{g} \frac{\sigma_z}{\sigma'_z} r_d \quad (5)$$

where  $\tau_d$  (stress reduction coefficient);  $\sigma_z$  and  $\sigma'_z$  (total and effective vertical overburden stresses);  $g$  (acceleration of gravity);  $a_{max}$  ( peak horizontal acceleration at the ground surface generated by the earthquake);  $r_n$ (correction coefficient to cyclic count( $=0.1(M-1)$ ;  $M$  = magnitude));  $r_d$  (decrease coefficient ( $= 1 - 0.015z$ ;  $z$  = depth (meter))). Figure 7 shows the depth distribution of  $F_L$  on input earthquake condition ( $M: 6.8, a_{max}: 250gal$ ) used to design generally. Figure 8 shows the depth distribution of  $F_L$  by value on the earthquake of Chuetsu offshore (2007) in Niigata Prefecture ( $M: 6.8, a_{max}: 400gal$ ). The depth distribution of  $F_L$  based on the CPT results and based on the

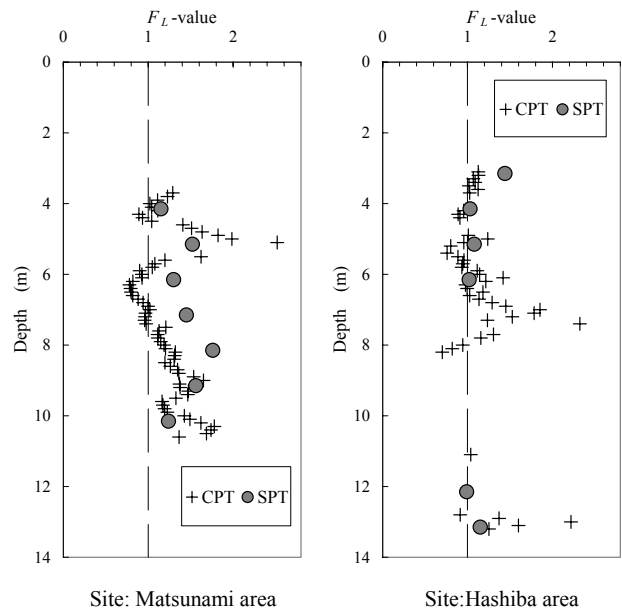


Fig. 7. The depth distribution of  $F_L$  on input earthquake condition ( $M:6.8, a_{max}:250gal$ ) used to design generally

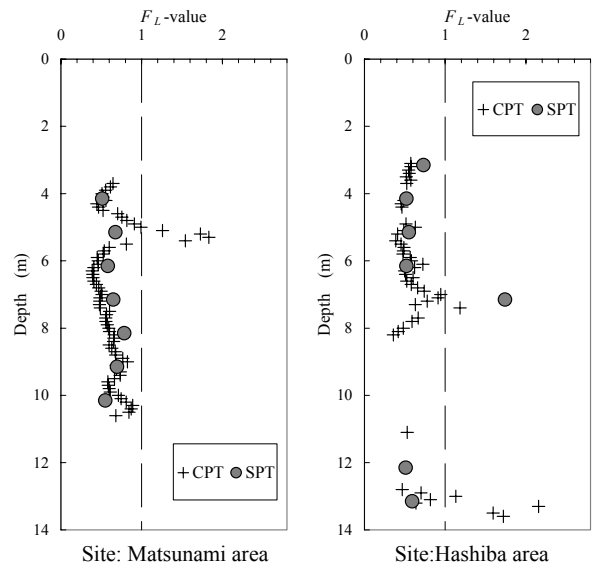


Fig. 8. The depth distribution of  $F_L$  by value on the earthquake of Chuetsu offshore (2007) in Niigata Prefecture ( $M:6.8, a_{max}:400gal$ )

SPT and the grain size analysis results are roughly corresponding though  $F_L$  based on the CPT results is a little smaller than it based on the SPT and the grain size analysis results. There is little liquefied layer ( $F_L < 1.0$ ) at the design condition on both areas (Fig. 7). On the other hand, when the earthquake condition measured in this time is given, the liquefied layer on Hashiba area is calculated GL-3~7m, and it on Matsunami area is calculated GL-3~10m(Fig. 8). The sand boil is greatly generated due to the liquefaction on this earthquake in both housing areas. It can be said that  $F_L$  shown in Figure 7 almost agrees with this phenomenon.

## EVALUATION OF THE LIQUEFACTION INFLUENCE IN THE HOUSING

The damage of the housing caused by liquefaction becomes at the position of the liquefaction layer that is thick and shallow remarkable. The damage of the foundation and the housing is different in the level, the thickness, the depth of the liquefaction layer etc. Moreover, it is not related to the damage of the housing and the residential area immediately even if the liquefaction layer is in the ground. Therefore, it is necessary to evaluate the influence that liquefaction gives the housing. In this research, the three evaluation methods of the influence (a, b, c) that liquefaction gives the housing in the flat ground are used. The methods are shown as follows.

(a) Evaluation method by the liquefaction index ( $P_L$ ) (N.L.A., 1998)

The liquefaction index ( $P_L$ ) is proposed as one index that evaluated the influence that liquefaction gives the housing. It is calculated from the following equation:

$$P_L = \int_0^{20} (1 - F_L) \cdot (10 - 0.5z) dz \quad (1 - F_L \geq 0) \quad (6)$$

Table 3 shows the liquefaction judgment division by  $P_L$  according to the liquefaction region-zoning manual (1998).

Table 3. The liquefaction judgment division by  $P_L$

Liquefaction extent of the impact	$P_L$ -value	
	Middle ground motion	Large ground motion
Small	$0 \leq P_L \leq 5$	$0 \leq P_L \leq 5$
Large	$5 < P_L \leq 15$	$5 < P_L \leq 20$
Huge	$15 < P_L$	$20 < P_L$

(b) Evaluation method by the dynamic surface displacement ( $D_{cy}$ ) (A.I.J., 2001).

The dynamic surface displacement ( $D_{cy}$ ) is proposed as one index that shows the relation between the dynamic horizontal displacement of the ground surface caused by liquefaction and the damage level of the housing. It depends on the following procedures when the CPT result is used.

1)  $N$ -value converted by the CPT results (Eq. 2) is treated as  $N$ -value by the SPT results.

2) Corrected  $N$ -value ( $N_a$ ) to  $F_c$  and  $\sigma'_z$  is calculated from Equation 7.

$$N_a = N_1 + \Delta N_f \quad (7)$$

where  $N_1 = \sqrt{98/\sigma'_z} \cdot N$ : corrected  $N$ -value concerning confining pressure ( $N_1 = \sqrt{98/\sigma'_z} \cdot N$ ):  $\Delta N_f =$  corrected increment value concerning  $F_c$  shown in Figure 9.

3) Cyclic shear stress of the both depth corresponding to  $N_a$  and  $\tau_d/\sigma'_z$  ( $\gamma_{cy}$ ) is presumed from Figure 10.

4) It is assumed that  $\gamma_{cy}$  of the each depth is generated in the same direction. And,  $\gamma_{cy}$  is integrated into a vertical direction. And, the maximum horizontal displacement by integrating  $\gamma_{cy}$  into a vertical direction is obtained.

5) The maximum horizontal displacement is treated as the dynamic surface displacement ( $D_{cy}$ ). And the influence that liquefaction gives the housing is evaluated to the value of  $D_{cy}$  shown in Table 4.

(c) Evaluation method using the relation of two-layer ground (the liquefied layer and the non-liquefied layer) (U.D.Co., 2003)

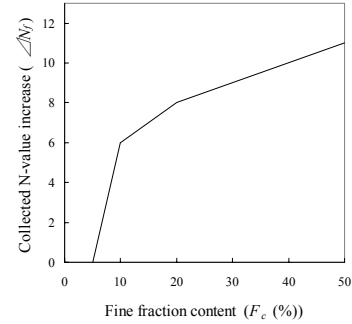


Fig. 9. Relation between  $F_c$  and  $\Delta N_f$

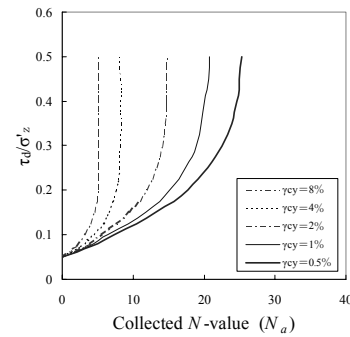


Fig. 10. Relation between  $N_a$ ,  $\gamma_{cy}$ , and  $\tau_d/\sigma'_z$

Table 4. Relation between  $D_{cy}$  and the damage level of liquefaction

$D_{cy}$ (cm)	Liquefaction extent of the impact
0	None
5	Minor
5-10	Small
10-20	Medium
20-40	Large
40	Huge

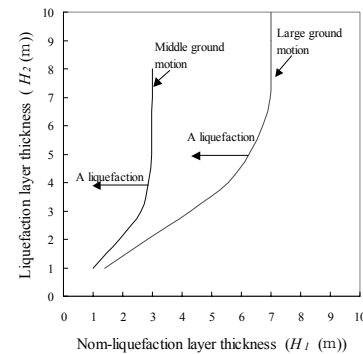


Fig. 11. The borderline of liquefaction in relation between  $H_1$  and  $H_2$

The clay soil or unsaturated soils that is shallower than the position of groundwater level are the soil layers where the possibility of liquefaction is a little. Therefore, even if the saturation sandy soil under groundwater level is caused by liquefaction at the earthquake, it might

not influence the housing area and the housing by non-liquefied layer on the surface ground. Figure 11 shows a borderline of liquefaction in the both earthquake motion. This plotted points in Figure 11 gives us the presence of damage by liquefaction. Table 5. shows the evaluation result of the influence that liquefaction gives the housing using method 1-3. It is calculated that  $P_L=0.0 \sim 1.2$  (Matsunami),  $P_L=0.0 \sim 1.1$  (Hashiba),  $D_{cy}=0.0 \sim 1.0$  (Matsunami), and  $D_{cy}=0.3 \sim 1.5$  (Hashiba), and it can be said that the influence by liquefaction on the housing is a little in the design earthquake condition ( $a_{max}=250\text{gal}$ ). However, it is calculated that  $P_L=9.0 \sim 16.7$  (Matsunami),  $P_L=12.9 \sim 16.2$  (Hashiba),  $D_{cy}=10.2 \sim 15.3$  (Matsunami), and  $D_{cy}=7.6 \sim 11.5$  (Hashiba), and it can be said that the influence by liquefaction on the housing is very large in this seismic condition. In addition, the evaluation method using

Table 5. The evaluation result of the influence that liquefaction gives the housing

Site:Matsunami area					
Earthquake emotion	Method	Ground Investigation data		Reference	
		CPT	SPT, $F_c$		
$M$	$a_{max}$				
250 gal	a	$P_L$ -value	1.2	0	Table. 3.
		Judgment	Small	Small	
	b	$D_{cy}$	1.0	0	Table. 4.
		Judgment	Minor	None	
	c	$H_1$ (m)	5.8	-	Fig.11
		$H_2$ (m)	1.5	0	
Judgment		OK	OK		
	a	$P_L$ -value	16.7	9.0	Table.3.
Judgment		Large	Large		
b	$D_{cy}$	10.2	15.3	Table. 4.	
	Judgment	Middle	Middle		
c	$H_1$ (m)	3.7	4.15	Fig. 11	
	$H_2$ (m)	6.5	6.0		
Judgment		NG	NG		
	Site:Hashiba area				
Earthquake emotion	Method	Ground Investigation data		Reference	
		CPT	SPT, $F_c$		
$M$	$a_{max}$				
250 gal	a	$P_L$ -value	1.1	0.02	Table. 3
		Judgment	Small	Small	
	b	$D_{cy}$	0.3	1.5	Table. 4
		Judgment	Minor	Minor	
	c	$H_1$ (m)	5.2	12.2	Fig.11
		$H_2$ (m)	0.8	1.0	
Judgment		OK	OK		
	a	$P_L$ -value	12.9	16.2	Table.3
Judgment		Large	Large		
b	$D_{cy}$	7.6	11.5	Table. 4	
	Judgment	Small	Middle		
c	$H_1$ (m)	4.6	4.2	Fig. 11	
	$H_2$ (m)	3.6	5.0		
Judgment		NG	NG		

Note: NG; A-liquefaction OK; Non-liquefaction

the relation of the non-liquefied layer and the liquefied layer of the ground surface gives us the similar result to method 1 and method 2. Thus, we obtained an almost similar result by three methods. Moreover, an obviously different results in case of design condition and this time earthquake condition is obtained. We thought that the liquefied layer became remarkably thick because this earthquake motion is larger than the earthquake motion using the designs. The layer that changes into the liquefied layer by the difference of this earthquake motion is thought to be sand layer of  $N$ -value 15~20.

## CONCLUSIONS

This paper reports a result of SWS, boring investigation, standard penetration test (SPT), and three component cone penetration test (CPT) on the housing areas that had been caught the liquefaction damage by the earthquake of Chuetsu offshore (2007) in Niigata Prefecture. As a result, the following conclusions were obtained.

(a) The judgment method of liquefaction by the CPT results was compared with the judgment method by the SPT and grain size analysis results. It has been obtained a result similar to both though it is a simple method. In addition, these judgment results were able to explain the housing damage and the boil sand caused by an actual liquefaction.

(b) It was observed that the maximum horizontal acceleration was larger than the designed acceleration used in general, and the value of seismic intensity scale is strong with 6<sup>+</sup>. Therefore, it has been understood that the non-liquefied layer in the design condition became a liquefied layer because of this earthquake condition.

It is necessary to establish the soil investigation of private housing that used by the judgment of liquefaction in Japan. It may be said that the CPT is the investigation method that is influential at the point where there is easily a liquefaction judgment. We think that it will be necessary to suggest a ground improvement method of housing sites aimed for liquefaction countermeasure as well as investigation method in future.

## REFERENCES

- Inada M. (1960), "Interpretation of Swedish weight sounding", *Monthly Magazine of Japanese Geotechnical Society*, Vol.8, No.2, pp.13-18.
- Saematsu T and Suzuki Y(2005), "Correlation between CPT data and soil characteristics, Part I: Evaluation of soil classification and SPT N-value", *Japanese Geotechnical Society*.
- Robertson, P.K. (1990), "Soil classification using the cone penetration test", *Canadian Geotechnical Journal*, Vol. 27, No. 1, pp.151-158.
- Architectural Institute of Japan (2001), "Recommendations for design of building foundations".
- National Land Agency (1998), "The liquefaction region-zoning manual"
- Urban Development Corporation (2003), "A seismic design manual on residential area (a plan)", pp.36-38.