

Development of evaluation function for openability of opening diameter of aluminum beverage bottles and its application to optimum design

メタデータ	言語: eng 出版者: 公開日: 2017-10-03 キーワード (Ja): キーワード (En): 作成者: メールアドレス: 所属:
URL	http://hdl.handle.net/2297/35702

Development of Evaluation Function for Openability of Opening Diameter of Aluminum Beverage Bottles and Its Application to Optimum Design

Takanori Chihara¹

Tokyo Metropolitan University, 6-6, Asahigaoka, Hino, Tokyo, 191-0065, Japan

Koetsu Yamazaki²

Kanazawa University, Kakuma-machi, Kanazawa, Ishikawa, 920-1192, Japan

Saiki Sobajima³

Kanazawa University, Kakuma-machi, Kanazawa, Ishikawa, 920-1192, Japan

and

Jing Han⁴

Universal Can Corporation, Shizuoka, 1500, Suganuma, Oyama, Sunto-gun, Shizuoka, 410-1392, Japan

The present paper proposes an evaluation function of openability considering the transition of gripping postures, i.e. two-finger gripping and three-finger gripping, so as to evaluate opening ease of aluminum beverage bottles and to specify the rigorous dimension of the cap diameter that is best suited for consumers' satisfaction. First, we have investigated effects of cap diameter on the gripping postures. It is found that subjects tend to shift the gripping posture from two-finger gripping (gripping with thumb and first finger) to three-finger gripping (gripping with thumb, first, and second finger) with increase of the opening diameter. An evaluation function is defined as a ratio between maximum torques that consumers can apply and a required torque for opening. In addition, the cap diameter is the only design variable, and the thumb length, which associates with the transition of the gripping postures and a maximum gripping force, is selected as a state variable in order to take individual differences into consideration. Moreover, an evaluation function is formulated considering the transition of the gripping postures of consumers. The function is composed by using the data obtained from measurement of the maximum gripping force, the maximum torque, and the thumb length, and then the function is optimized. The result of optimization has shown that the optimum opening diameter is obtained at 28.0 mm in case of the subjects.

Nomenclature

D	=	Opening diameter of aluminum beverage bottles
L_t	=	Thumb length of subjects
I	=	Discriminate function of gripping postures
μ	=	Static friction coefficient between finger and cap
f_{\max}	=	Maximum gripping force
$f_{1\max}$	=	Thumb's component of maximum gripping force
$f_{2\max}$	=	First finger's component of maximum gripping force
$f_{3\max}$	=	Second finger's component of maximum gripping force

¹ Assistant Professor, Faculty of System Design.

² Professor, Collage of Science and Engineering, Fellow AIAA.

³ Resarch Scholor, Collage of Science and Engineering.

⁴ Manager, Technology and Development Department, AIAA member.

T_{\max}	=	Maximum torque
T_{open}	=	Required torque
F	=	Evaluation function of openability
O_1	=	Burden ratio with two-finger gripping
O_2	=	Burden ration with three-finger gripping
c_1	=	Indicator of two-finger gripping
c_2	=	Indicator of three-finger gripping
α	=	thumb-first finger angle
β	=	thumb-second finger angle

I. Introduction

Aluminum beverage bottles with screw tops have been launched in the Japanese market in recent years to meet the modern-day drinking habits of consumers. These can be repeatedly resealed, and are designed to recycle many times better than the resealable PET bottles. Therefore, aluminum beverage bottles are paid attention in the Japanese market because of the point of view on reduction of environmental burdens. The following features are required for beverage containers such as aluminum beverage bottles: improved shelf life (the length of time that packaged food can be stored), sealing performance, price, and so on. In addition to the above-mentioned basic features, universal designs based on ergonomics have been required while developing beverage containers and are expected to enhance consumers' convenience. For example, Han et al. have investigated that the relationship between tab ring shape and the feelings in the fingertip when opening aluminum beverage cans; and they have concluded that the tab with a larger contact area with finger is better¹.

Openability of the bottle caps, which is one of a demand of aluminum beverage bottles for consumers' satisfaction, has been studied by some researchers²⁻⁷. However, these researchers have not determined the optimum opening diameter that is easy to open. Additionally, the difference of gripping postures has not been considered, while it is possible that the difference affects openability of caps. Therefore, to evaluate openability more precisely and determine the optimum opening diameter for openability, we derive an evaluation method for openability considering the difference of gripping postures.

In this study, first, effects of the cap diameter and hand dimensions on gripping postures is investigated. Next, a physical characteristic that represents openability is decided, and then an evaluation function of openability, which is formulated considering the difference of gripping postures and the individual differences, is defined. The response surface of the evaluation function is composed by using Radial Basis Function Network (RBFN). Then, the evaluation function is optimized to determine an optimum opening diameter that is easiest to open.

II. Survey on Transition of Gripping Postures

A. Method

A survey on gripping postures was carried out in order to investigate the effects of the cap diameter and the hand dimensions of subjects on the gripping postures. Subjects were 12 Japanese university students (8 males and 4 females), and all of them are healthy and right-handed. All subjects were seated during the experiment, and were required to twist the cap of the experimental bottles. The gripping postures of all subjects have been recorded using digital camera. As shown in Fig. 1, five kinds of experimental bottles with opening diameter of 28, 33, 38, 43 and 48 mm were used, and all of experimental bottles have been opened. In addition, we have also measured the hand dimensions of the subjects as shown in Fig. 2, because we have predicted that the dimensions would affect the gripping posture.



Figure 1. Five kinds of experimental bottle samples

B. Results and Discussions

Three kinds of gripping postures shown in Fig.3 have been found from the results of the experiment. Fig.3 a) is clipping the cap with thumb and first finger (hereafter referred to as “two-finger gripping”), and Fig.3 b) is clipping the cap with thumb and second finger, and placing first finger (hereafter referred to as “three-finger gripping”). In addition, Fig.3 c) is gripping with thumb and first finger in the inverse direction (hereafter referred to as “inverse gripping”). Among the 12 subjects, only two subjects gripped with the inverse gripping, and the other subjects gripped with two-fingers gripping and three-finger gripping; hence, we eliminate the data of the two subjects who gripped with the inverse gripping, and noted the two gripping postures hereafter.

Figure 4 represents the transition of gripping posture associated with the increase of the cap diameter. From Fig.4, it is clear that the relative frequency of the two-finger gripping decreases and that of the three-finger gripping increases with increase of opening diameter, and the order of the two relative frequency replace each other at 38 mm. Thus, the gripping posture of the subjects transits from two-finger to three-finger gripping associated with increase of the opening diameter.

Transition diameter is defined as a diameter at which participant begins to grip with the three-finger gripping; here, we assume that the participant that grips all of the five opening diameter with the two-finger gripping begins to grip with the three-finger gripping at 53 mm. Table 1 shows the correlation coefficients between the transition diameter and each dimensions of hand. In addition, Figure 5 illustrates a relationship between the transition diameter and the thumb length. From Table 1, all of hand dimensions are correlated with the transition diameter at a 1% significance level. Among the dimensions, the thumb length has the highest correlation coefficient ($r = 0.837$). In addition, as described later, the thumb length is also correlated with the maximum gripping force; therefore, we use the thumb length as a representative variable that represents individual differences in this paper. Moreover, we assume that the transition diameter is expressed by the linear function of the thumb length, and the discriminate function of gripping postures I is given as a function of the opening diameter D and the thumb length L_t as follows;

$$I(D, L_t) = D - 1.54L_t + 51.6 \quad (1)$$

Here, gripping posture is the two-finger gripping when the function is less or equal to zero ($I(D, a) \leq 0$), while the three-finger gripping when the function is greater than zero ($I(D, a) > 0$).

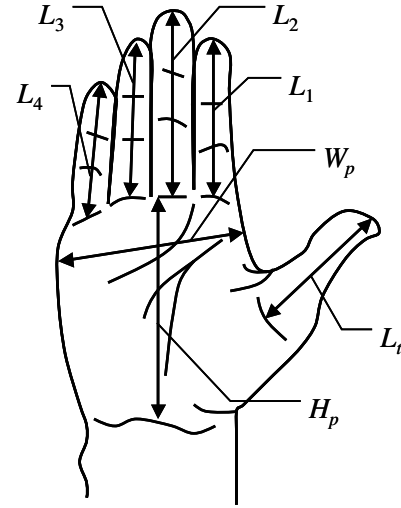


Figure 2. Anthropometric dimensions of hand



a) Two-finger b) Three-finger c) Inverse
Figure 3. Gripping postures

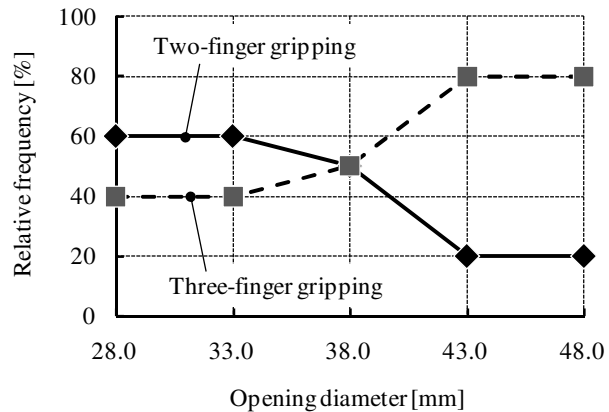


Figure 4. Transition of gripping posture

III. Evaluation Function of Openability

A. Definition of Evaluation Function of Openability

In general, consumers grip the screw cap of the bottle with their dominant hand and grip the bottle body with their non-dominant other hand, when they open the screw cap. After the action, they twist their hands to open the screw cap. The torque required to open the screw cap of the bottle is equal to the torque that the consumers apply to the bottle body when they twist their hands. Because the diameter of the screw cap is smaller than that of the bottle body, the twisting torque required to open the cap is determined by the gripping force of screw top. Therefore, we focus on the gripping force of consumers so as to evaluate the opening diameter for consumers' satisfaction.

It is considered that opening ease is determined by the following factors: smaller required torque to open the cap and larger torque that consumers apply. However, the smaller required torque does not always give the opening ease, similarly, the larger torque applied by the consumers does not always give the opening ease. Therefore, we need to evaluate the required torque to open the cap (hereafter referred to as "required torque T_{open} ") and the maximum torque that consumers can apply (hereafter referred to as "maximum torque T_{max} ") simultaneously. Thus, we use a ratio of the required torque to the maximum torque (hereafter referred to as "burden ratio T_{open}/T_{max} ") as an indicator of openability. In other words, we assume that the smaller burden ratio makes it easier to open the cap.

When the maximum gripping force that consumer can apply is defined as total applied force of all fingers in the radial direction of cap (hereafter referred to as "maximum gripping force f_{max} "), the maximum torque is given as follows;

$$T_{max} = \frac{1}{2} \mu D f_{max} \quad (2)$$

where μ and D denote the static friction coefficient between finger and the cap, and the opening diameter of the cap. Hence, the burden ratio is translated as follows:

$$\frac{T_{open}}{T_{max}} = \frac{2T_{open}}{\mu D f_{max}} \quad (3)$$

Here, we apply a theoretical equation of required torque derived by Itoh et al. as the required torque⁸. The openability of aluminum beverage bottle is evaluated by the assumption that the smaller the burden ratio is, the more consumers feel easy to open the cap.

B. Formulation of Evaluation Function of Openability

We define the evaluation function of openability by considering the following two variables: the bottle opening diameter, and selected representative hand dimension. Between two variables, the bottle opening diameter is the only design variable, and the hand dimension is a state variable that fluctuates in a confined range. Hence, we must define the evaluation function as a function that evaluates the opening diameter in a given range of state variable. Therefore, we define the evaluation function as follows;

$$F(D) = \int_{L_{min}}^{L_{max}} [(O_1(D, L_t) \cdot c_1 + O_2(D, L_t) \cdot c_2) P_{Li}(L_t)] dL_t \quad (4)$$

where index numbers 1 and 2 represent the two-finger gripping and the three-finger gripping. a_{min} and a_{max} are the

Table 1. Correlation coefficients between transition diameter and anthropometric dimensions of hand

Dimensions of hand	Correlation coefficient
Thumb length L_t	0.837**
First finger length L_1	0.538**
Second finger length L_2	0.735**
Third finger length L_3	0.732**
Fourth finger length L_4	0.633**
Palm width W_p	0.603**
Palm length H_p	0.730**

**p<0.01

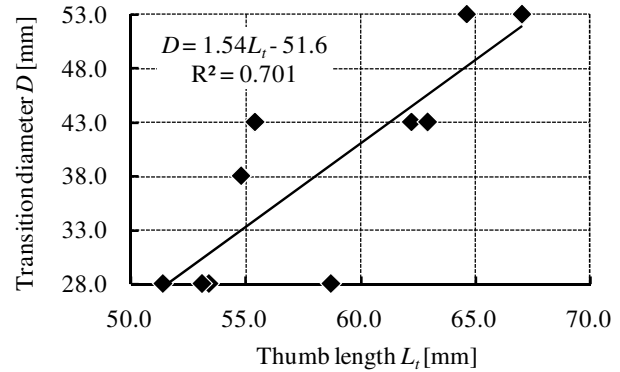


Figure 5. Relationship between transition diameter and thumb length

minimum and maximum bounds of the hand dimension. $P_{L_i}(L_i)$ is a weight function based on the distribution of the hand dimension⁹. In addition, c_1 and c_2 denote the identifier of the gripping postures, and they are given by the following equations;

$$c_1 = \begin{cases} 1 & I(D, L_i) \leq 0 \\ 0 & I(D, L_i) > 0 \end{cases} \quad (5)$$

$$c_2 = \begin{cases} 1 & I(D, L_i) > 0 \\ 0 & I(D, L_i) \leq 0 \end{cases}$$

$O_1(D, a)$ and $O_2(D, a)$ are the burden ratio of the two-finger and three-finger gripping; and they are the response surface of the output predicted using the RBFN. The detailed procedure for constructing a response surface using the RBFN may be referred to the references¹⁰. The smaller the value of $F(D)$, the lower the burden of opening is and consumers feel easy to open.

IV. Measurement of Maximum Gripping Force and Torque

A. Method

We have measured the maximum gripping force when subjects grip and twist the cap. The contact area between the cap and fingers in case of the two-finger gripping may be smaller than in case of the three-finger gripping; therefore, it is possible that apparent friction coefficient between the cap and fingers changes depending on the gripping posture. Hence, we have also measured the maximum torque in addition to the maximum gripping force, and considered the effects of the gripping posture on the apparent friction coefficient.



Figure 6. Four kinds of bottle opening for measurement device

We have performed an experiment in which subjects are 10 Japanese university students that are the same as the aforementioned survey excepting who have gripped with the inverse gripping. As shown in Fig. 6, four kinds of experimental bottles with opening diameter of 28, 33, 38, and 43 mm have been used, and each bottle opening has had a force sensor (9132B, KISTLER Co., Ltd.) inside of it. The normal forces in the radial direction of the cap have been measured by the force sensor, and have been kept computerized records through amplifier (5011B, KISTLER Co., Ltd.) and analog-digital converter (EC-2386, ELMEC Co., Ltd.). Simultaneously, the maximum torques have been measured by a torque meter (TNX-5, NIDEC-SHIMPO Co., Ltd.). The bottle opening devices have been fixed on a plastic bottle body, and the bottle opening devices do not rotate.

All subjects have been seated during the experiment, and have been required to twist the cap of the experimental bottles as much as possible for 2.0 seconds. In addition, they have been required to grip the cap with their right hand, and with the two-finger and three-finger gripping. The experiment has been repeated two times; hence, the number of trials of one subject is 16 times in total (i.e. 2 gripping postures, 4 experimental bottle openings, and 2 sets). Moreover, 10 minutes rest has been taken between each trial of the experiment, and measuring sequence has been randomized to erase the effect of order.

B. Procedure for Calculating Maximum Gripping Force

The maximum gripping force of the two-finger gripping is calculated by doubling the thumb's component of the maximum gripping force (see Fig.7 a)).

In case of three-finger gripping, because the gripping force can be measured in only one direction by the force sensor, the thumb's component of the maximum gripping force has been

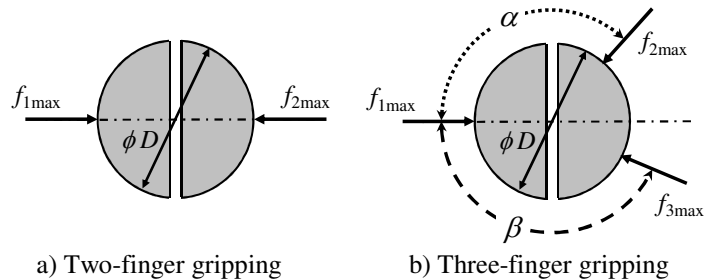


Figure 7. Finger positions for equilibrium of force

measured by placing the middle of proximal phalanx of thumb as shown in Fig. 8. In addition, the position and angles of fingers have been measured by using ink and paper as shown in Fig.9. Then, we have obtained the maximum gripping force by equilibrium of force (see Fig.7 b)). The equilibrium equations are given by

$$f_{\max} = |f_{1\max}| + |f_{2\max}| + |f_{3\max}| \quad (6)$$

$$f_{1\max} + f_{2\max} \cos \alpha + f_{3\max} \cos \beta = 0 \quad (7)$$

$$f_{2\max} \sin \alpha = f_{3\max} \sin \beta \quad (8)$$

where $f_{1\max}$, $f_{2\max}$, and $f_{3\max}$ are thumb's, first finger's, and second finger's components of the maximum gripping force, respectively. In addition, α and β denote the angles between the thumb and the first finger, and the thumb and the second finger.

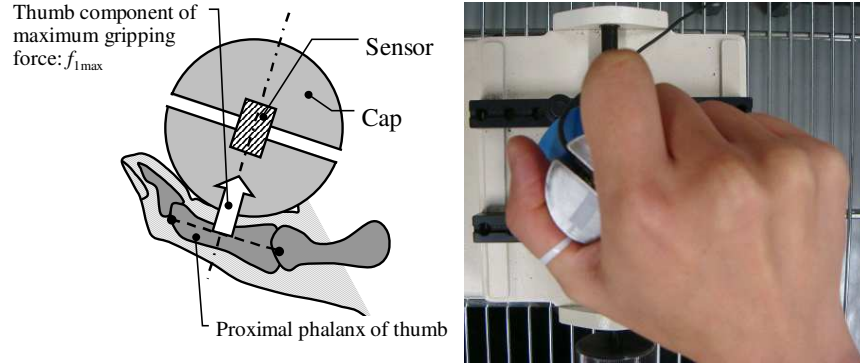


Figure 8. Measuring method for thumb component of maximum gripping force

C. Results and Discussions

Table 2 shows the correlation coefficients between the maximum gripping forces and each hand dimensions that have been measured in the aforementioned survey. It is found that the thumb length has relatively high correlation coefficient in case of two-finger gripping, and the highest correlation coefficient in case of three-finger gripping. As mentioned before, the thumb length is correlated with the transition diameter in addition to the maximum gripping force; therefore, we use the thumb length as a representative variable that represents individual differences.

The average values of the maximum gripping force and maximum torque are shown in Figs.10 and 11. Moreover, Figure 12 shows the apparent friction coefficients that have been calculated by using the maximum gripping force and torque. The curves shown in Fig. 12 approximate the apparent friction coefficients by quadratic functions of opening diameters. In Fig. 10, the maximum gripping force of the two-finger gripping is higher than that of the three-finger gripping over the entire range of opening diameter. Thus, the subjects perhaps feel easier to exert their force on caps when they grip with the two-finger gripping than the three-finger gripping. From Fig. 11, it is found that the maximum torque of the

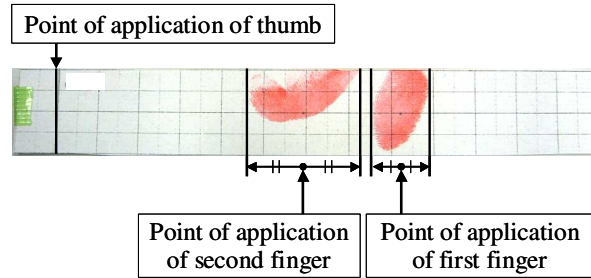


Figure 9. Example of contact area on first and second finger

Table 2. Correlation coefficient between maximum gripping force and anthropometric dimensions of hand

Dimensions of hand	Two fingers gripping	Three fingers gripping
Thumb length L_t	0.702**	0.320**
First finger length L_1	0.603**	0.265*
Second finger length L_2	0.659**	0.231*
Third finger length L_3	0.680**	0.270*
Fourth finger length L_4	0.574**	0.280*
Palm width W_p	0.593**	0.277*
Palm length H_p	0.714**	0.298**

*p<0.05, **p<0.01

two-finger gripping is higher than that of the three-finger gripping when the opening diameter is relatively small, while there is little difference of maximum torque between the two-finger and three-finger gripping when the opening diameter exceed about 38 mm. This may be explained the fact that the apparent friction coefficient of the three-finger gripping is higher than that of two-finger gripping as shown in Fig. 12; because, perhaps the contact area between caps and three fingers (i.e. thumb, first, and second finger) is larger than two fingers (i.e. thumb and first finger). Further, the apparent friction coefficient, at first, increases with the increase of opening diameter until it becomes the maximum value, and then it decreases. The explanation for this is that the contact area between caps and fingers increases with the increase of opening diameter when the opening diameter is relatively small, while it decreases when the opening diameter is relatively large; because, the contact location of fingers transit from the face to the tip of fingers with the increase of opening diameter. In addition, from the approximated curve shown in Fig. 12, the maximum apparent friction coefficient is obtained at about 35 mm in case of the two-finger gripping, while about 39 mm in case of three-finger gripping.

From these results described above, we can conclude that the subjects grip the caps with the two-finger gripping that is easy to exert their force when the opening diameter is relatively small, and the apparent friction coefficient of two-finger gripping begins to decrease at about 35 mm; and then, they transit their gripping posture from the two-finger to the the three-finger gripping so as to maintain the apparent friction coefficient and the maximum torque.

V. Results of Optimization and Discussions

We have formulated Eq.(4) using the data obtained from the measurement of the maximum gripping force; then, we minimized the value of Eq.(4). In addition, the apparent friction coefficients shown in Fig. 12 have set on each opening diameter and gripping posture. The upper and lower bounds of the design and state variable are given as

$$\begin{aligned} 28.0 \leq D \leq 43.0 \\ 51.4 \leq L_i \leq 67.0 \end{aligned} \quad (9)$$

The two kinds of evaluation functions of openability shown in Fig 13 are composed by using the results of the two-finger and the three-finger gripping, respectively. In other words, they are formulated without considering the transition of gripping postures. As shown

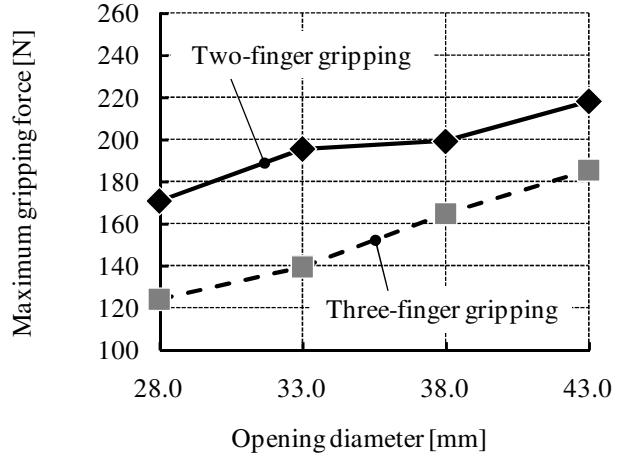


Figure 10. Average value of maximum gripping force

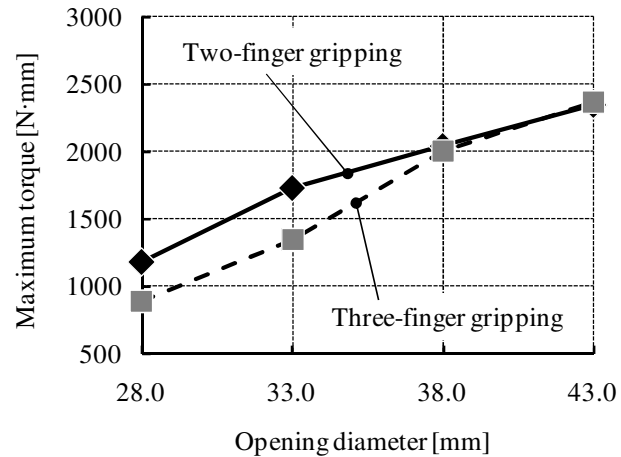


Figure 11. Average value of maximum torque

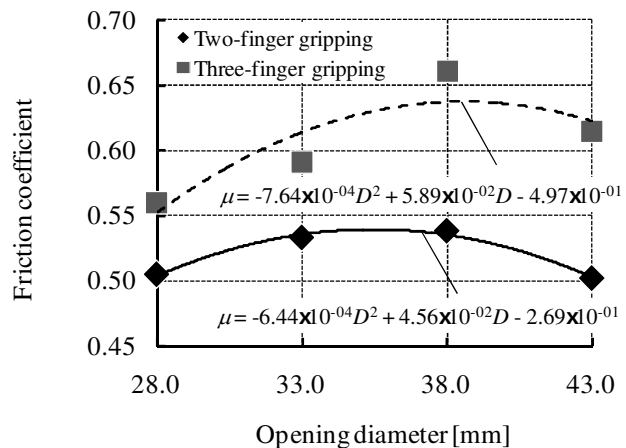


Figure 12. Average value of friction coefficient between finger skin and bottle caps

in Fig. 13, the optimum of the evaluation function in the case of two-finger gripping is obtained at 28.0 mm, while that in the case of three-finger gripping is obtained at 36.9 mm. Hence, it is found that the optimum opening diameter on openability probably changes if the gripping posture changes. Further, the two evaluation functions intersected each other at about 40 mm in opening diameter, and the magnitudes of them are inverted. This is in agreement with the result that the relative frequency of the two-finger and three-finger gripping replaced each other at 38 mm. Therefore, perhaps the subjects try to keep the burden ratio or the openability with the transition of the gripping posture.

Figure 14 shows the evaluation function that considers the transition of gripping postures. In addition, Figure 15 shows the average values of the subjects when each subject grips each opening diameter with their gripping postures. That is, the gripping postures are the same as what the subjects have done in the survey described in chapter 3. The satisfaction scores have been collected on a scale of -3 (very difficult to open) to 3 (very easy to open); thus, the higher the satisfaction score is, the easier to open the cap and subjects probably feel comfortable. The error bars in Fig. 15 represent standard errors of the satisfaction scores.

From Fig. 14, the optimum of the evaluation function is obtained at 28 mm. Hence, the burden ratio of the opening with a diameter of 28.0 mm is the lowest in the range of Eq.(13); but, it should be note that the optimum opening diameter, 28 mm, is for this subjects. On the other hand, from Fig. 15, the 38 mm has the highest average satisfaction score among the four kinds of opening diameters. However, there are no significant differences between the four satisfaction scores. This may be explained the fact that it is hard for the subjects to definitely feel the difference of openability; because they transit their gripping postures so as to maintain the maximum torque and the burden ratio. Therefore, it is difficult to decide the opening diameter for the openability based on the subjective evaluation of the subjects. The proposed evaluation function, however, can evaluate the opening diameter for openability quantitatively, because the function is based on the objective evaluation (i.e., burden ratio); thus, the 28 mm opening, which is the optimum of the proposed function, may be more reliable.

VI. Conclusions

In this study, we have proposed an evaluation function of openability, which considers the transition of gripping postures and the individual differences, for determining the optimum opening diameter for opening ease. We have

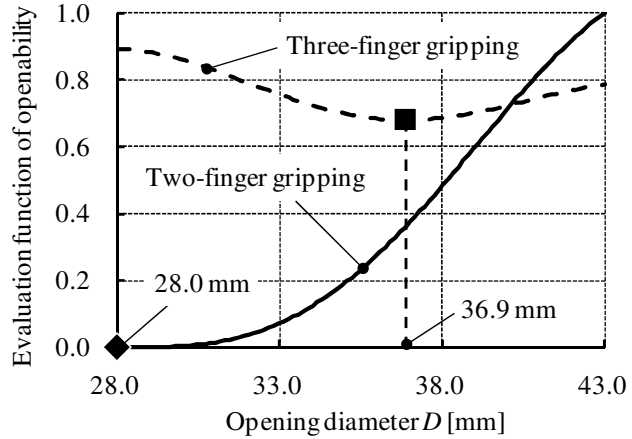


Figure 13. Evaluation function of openability on each gripping posture

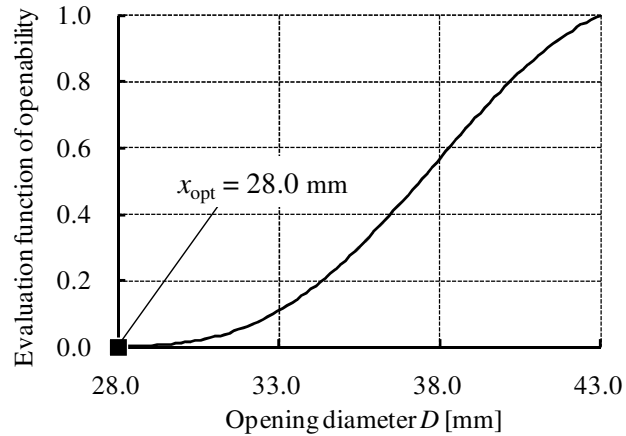


Figure 14. Evaluation function of openability

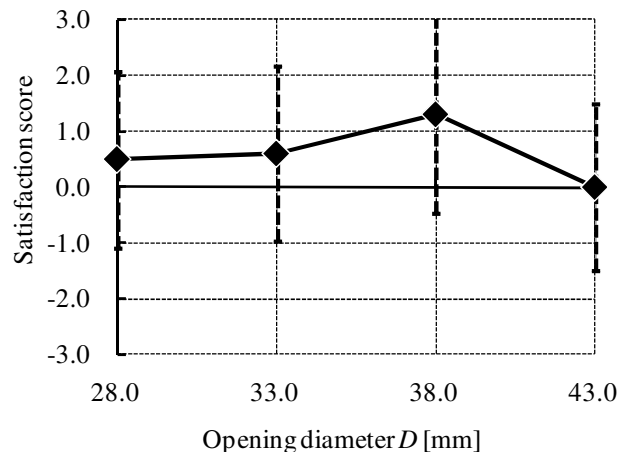


Figure 15. Average value of degree of openability

also optimized the evaluation function by performing experiments and have found that the burden ratio is lowest and subjects' comfort level is highest when the bottle opening diameter is 28.0 mm. If a certain gripping posture is intended, especially the three-finger gripping in case of this study, the true optimum diameter for the openability may not be obtained. Therefore, the proposed evaluation function can determine the precise optimum diameter with considering the transition of gripping postures. In addition, we have also found that the optimal opening diameter depends on individual differences, i.e., the thumb length of consumers. Thus, the proposed evaluation function can be used to determine the optimum opening diameter of bottles that are to contain beverages targeted at a particular category of consumers.

References

- ¹Han, J., Nishiyama, S., Yamazaki, K., Itoh, R., "Ergonomic design of beverage can lift tabs based on numerical evaluations of fingertip discomfort", *Applied Ergonomics*, Vol.39, No.2, 2008, pp.150-157.
- ²Imrhan, Sheik N., Loo, Chong, "Torque capabilities of the elderly in opening screw top containers", *Proc. of Human Factors and Ergonomics Society Annual Meeting*, Vol.30, No.12, Human Factors and Ergonomics Society, Dayton, OH, 1986, pp.1167-1171.
- ³Crawford, Joanne O., Wanibe, E., Nayak, L., "The interaction between lid diameter, height and shape on wrist torque exertion in younger and older adults", *Ergonomics*, Vol.45, No.13, 2002, pp.922-933.
- ⁴Voorbij, A.I.M., Steenbekkers, L.P.A., "The twisting force of aged consumers when opening a jar", *Applied Ergonomics*, Vol.33, No.1, 2002, pp.105-109.
- ⁵Yoxall, A., Langley, J., Janson, R., Wearn, J., Manson, G., "The Use of Uncertainty Analysis for the Design of Container Closures", *Packaging Technology and Science*, Vol.19, No.6, 2006, pp.139-147.
- ⁶Lewis, R., Menardi, C., Yoxall, A., Langley, J., "Finger friction: Grip and opening packaging", *Wear*, Vol.263, No.7-12, 2007, pp.1124-1132.
- ⁷Yoxall, A., Luxmoore, J., Rowson, J., Langley, J., Janson, R., "Size Does Matter: Further Studies in Hand-Pack Interaction Using Computer Simulation", *Packaging Technology and Science*, Vol.21, No.2, 2008, pp.61-72.
- ⁸Itoh, R., Yamazaki, K., Han, J., "A Study on Openability of an Aluminum Beverage Bottle", *Transactions of the Japan Society of Mechanical Engineers, Series C*, Vol.74, No.738, 2008, pp.475-483. [in Japanese]
- ⁹National Institute of Bioscience and Human Technology, "*Human body dimensions data for ergonomic design*", Japan Publication Service, Tokyo, No.1996, pp.81-117.
- ¹⁰Orr, M.J.L., "*Introduction to radial basis function networks*", URL: <http://anc.ed.ac.uk/rbf/rbf.html>, [cited 1996].